

# RM-IoT: An IoT-based Rapid Medical Response Plan for Smart Cities

Prabha Sundaravadivel  
Dept. of Electrical Engineering  
University of Texas at Tyler, USA.  
Email: psundaravadivel@uttyler.edu

Isaac Lee  
Texas Academy of Math and Science  
University of North Texas, USA.  
Email: IsaacLee@my.unt.edu

Saraju P. Mohanty  
Dept. of Comp. Sci. and Engg.  
University of North Texas, USA.  
Email: saraju.mohanty@unt.edu

Elias Kougianos  
Dept. of Electrical Engg.  
University of North Texas, USA.  
Email: elias.kougianos@unt.edu

Laavanya Rachakonda  
Dept. of Comp. Sci. and Engg.  
University of North Texas, USA.  
Email: RachakondaLaavanya@my.unt.edu

**Abstract**—Most of the health monitoring applications for response plans are used to alert or notify the users in case of emergency situations. Response plans help in overcoming an emergency scenario in case of a disaster. On several occasions, the person of interest receives medical attention, once there is an on-set of the medical condition. With current smart healthcare facilities, where there are advantages of monitoring one's health on a daily basis, a person does not need to wait to be critically ill or meet with a disaster in order to receive necessary medical services. Leveraging the advantages of smart healthcare architectures in this research, we propose a smart rapid medical response plan, which monitors the physiological signs of people in a community and gives regular feedback or alerts the hospitals accordingly. The proposed framework provides feedback on different scales by ensuring the well-being of the individuals and alerting them to be cautious towards potential health issues. The routing of these sensor networks based on the emergency level is demonstrated using an open-source tool, CupCarbon. The proposed framework was simulated using the ZigBee radio standard and the overall simulation time for 40 nodes was 95 seconds.

**Index terms**— Smart City, Smart Healthcare, Internet of Things (IoT), Emergency Response, Disaster Management

## I. INTRODUCTION

Response plans help us analyze the possibilities of overcoming a disaster. Emergency scenarios can be based on environmental disasters such as oil spills, poisonous gas leakages, cyclones, or epidemic breakouts such as malaria or dengue [1], [2], [3]. In the case of emergencies based on environmental parameters such as floods, earthquakes, and cyclones, it is important to design an effective fast response plan which would help in reducing the damages caused and save lives of thousands of people. In modern times, it is impossible to have a person assist someone all the time. At the same time, with the latest healthcare technologies, it is not very efficient to wait for a person to fall critically ill in order to cure them of disease. Analyzing physiological parameters continuously or periodically can help in overcoming such disasters.

The Internet of Things (IoT) helps in connecting many devices together, where each device is recognizable. In a cyber-physical world, many applications requiring real-time response and virtual objects are deployed. Some of the applications include surveillance [4], agriculture, healthcare, security, vehicular technologies, etc. [1], [5]. Architectures and elements used to deploy a wireless network can be easily merged with sensors to form an IoT network. Significant investments have been made by public and private agencies towards improving communications between healthcare providers and non-profit organizations when a disaster strikes [6].

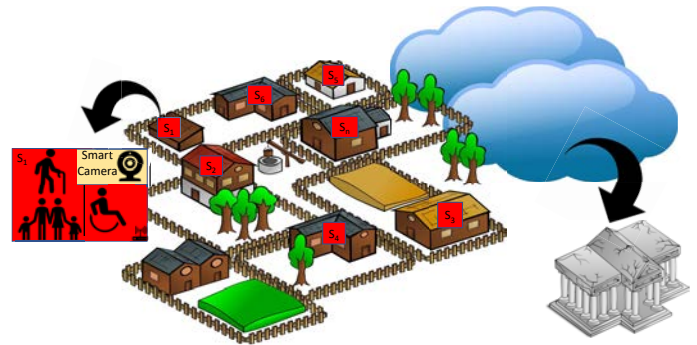


Fig. 1. Conceptual Overview of the proposed RM-IoT, a Smart Rapid Medical Response Plan

Figure 1 shows a cloud-based sensor system deployed in households of a community. At the sensor level, the system is a custom-built light-weight wearable smartwatch that contains a temperature sensor and heart rate sensor where each person's parameters are monitored along with their ID. Based on the pattern observed from the wearable of individuals, each household is graded as critical, high priority and warning. Many such sensors are connected together in the community and a feedback system is provided. If someone is having a prolonged

increase or fluctuations in temperature, the corresponding correlation of heart rate values is taken at that particular instance. The smart response plan helps in alerting the family and the health care providers and alerts the nearest medical facility or listed healthcare professional at the earliest. The proposed framework is modeled in CupCarbon [7]. CupCarbon is a wireless sensor network design and simulation tool that offers simulating environments for smart cities [8].

The organization of this paper is as follows: The novel contributions of this paper are described in Sec. II. A broader perspective of the smart response plan for smart cities is presented in Sec. III. The literature on existing research work for modeling response plans is discussed in Sec. IV. An overview of the system-level modeling of the response plan, which includes a brief discussion on the A\* algorithm, is given in Sec. V. The implementation of the designed blocks along with simulation results and the corresponding limitations are discussed in Sec. VI. Conclusions and directions for further research are given in Se. VII.

## II. NOVEL CONTRIBUTIONS

One of the biggest advantages of the Internet of Things is the remote assistance it offers through cloud connectivity. In order to benefit more from this technology, this paper proposes an IoT-based rapid response plan, RM-IoT, which helps in improving the overall health and living conditions of people in a community. The proposed system helps in seamlessly monitoring the vital signs, therefore reducing the total amount of money spent in a family towards wearables and other monitoring devices. As the data is being collected from different nodes in a community, they are further grouped depending upon the severity of the parameters or the condition. In the proposed system, along with addressing the critical scenarios, a solution to address high priority alerts is also given. This is done in order to keep the users well informed of their health and alert the medical facilities about potential high-risk scenarios. A response plan based on the A\* (A Star) search algorithm to find the nearest hospital in case of any emergencies is modeled. The clustering of data based on their priority is shown in CupCarbon. The proposed framework is modeled in CupCarbon using Senscript and the performance is analyzed in terms of energy efficiency and battery life.

## III. SMART MEDICAL RESPONSE PLAN IN SMART CITIES: A BROAD PERSPECTIVE

In the present world, monitoring physiological activities is a convergence of several technologies and business verticals. Wearable medical sensors are being widely used to monitor physiological signals such as heart rate, blood pressure, blood oxygen concentration, etc. In recent years, sensors deployed in hand-held devices such as mobile phones or tablets have also been used for monitoring vital signs. In spite of the wearable industry continuously improving with multiple sensing modules and highly accurate algorithms, there exist a few limitations in making the entire community health aware or healthier. This is because the wearables are concerned only in

improving the individual's health and if the entire community needs to benefit, each one needs to own a wearable, which would increase the total cost budget. Figure 2 shows the block diagram of the proposed medical response plan.

The monitoring unit is a light-weight custom-built wearable with sensors that are used for monitoring the vital signs of the users and a processor that can be used to schedule the data acquisition. The processor also facilitates transmitting the sensor data to the IoT cloud through the WiFi module. All the sensor data along with the respective time stamps and IDs are sent to the Node Clustering Unit (NCU), where at first nodes of similar locations are grouped together. This is done because it makes the computation of the shortest path from the source to the destination easier. After grouping the nodes, the optimal parameters are compared to classify the data into critical, warning and safe. The output of the node clustering unit is sent to the Path Designer Unit (PDU), implemented in the IoT cloud, where the grouped data is given as input to the pathfinder along with the database of the nearest medical facilities.

## IV. RELATED PRIOR RESEARCH

In [9], five strategies for designing the response plan in the case of natural disasters such as hurricanes, tornadoes, earthquakes etc. are presented. A response plan analyzing the soil erosion and water loss crisis is proposed in [10]. An emergency response plan based on oil spill has been proposed in [11]. Similarly, an emergency response plan for smallpox attack, which would require mass vaccinations is proposed in [12]. An analysis of information technology components in case of an emergency is given in [6]. In [13], an emergency predication based on the forecast updates is proposed. A fire simulation model has been introduced in [14] where the spreading of fire is analyzed as a stochastic process. A fuzzy based evaluation model for an emergency response plan has been proposed in [15]. The A\* algorithm has been used in pathfinding for a perfect maze [16] and a hexagon-based environment [17]. A hybrid approach based on fuzzy logic and A\* to improve the life-time of wireless sensor networks has been proposed in [18]. In [19], a PSO-based packaging algorithm for an IoT based system is proposed. With help of these machine learning techniques deployed in wireless sensor networks, seamless monitoring solutions have been developed [20]. A respiratory monitoring system based on human activities is proposed in [21].

## V. SYSTEM LEVEL MODELING OF SMART MEDICAL RESPONSE PLAN

### A. Health Monitoring Unit in Smart Cities

In any response plan, the monitoring parameter is the primary focus, based on which the severity of the response plan can be decided. The monitoring parameters considered for the Health Monitoring Unit in the RM-IoT framework are temperature and heart rate values. Temperature values can play a vital role in determining one's overall health [22].

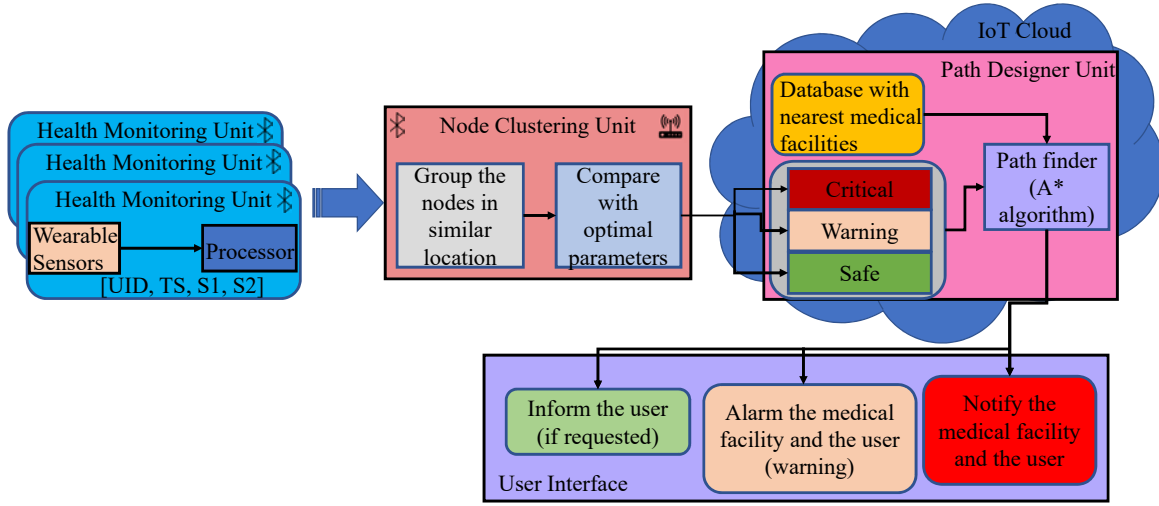


Fig. 2. Basic Block Diagram of the Proposed Rapid Medical Response Plan.

Correlating the temperature sensor values along with the heart rate values can help in monitoring underlying conditions and address critical conditions immediately.

### B. Algorithm for Smart Response Plan

In a highly interconnected smart city, countless nodes can be used anywhere for anything: from functioning as a medium for wireless signals and data to facilitating communication between different devices. The use of nodes is undoubtedly useful for quick data transfer, and an algorithm can be applied to determine the fastest, or most optimized, path from the source (in this case the patient's place of residence) to the destination (the medical facility) in an intricate network of nodes found in a smart city.

The algorithm used for this research is the A\* ("A Star") Algorithm, a highly successful pathfinding algorithm for finding the shortest distance between nodes [23]. This algorithm is a best-first search algorithm and is an extension of Dijkstra's algorithm. Figure 3 shows an example of the best-first search computation by the A\* algorithm from start node to end node.

The A\* algorithm takes into account three main values during execution: total weight ( $f(n)$ ), cost of the path from the start node to  $n$  ( $g(n)$ ), and the heuristic value, or the cheapest path to the destination ( $h(n)$ ). The heuristic distance, for the purposes of the algorithm implementation, can be thought of as the Euclidean distance between  $n$  on the plane to the destination on the same plane. The total weight value  $f(n)$  is sum of  $g(n)$  and  $h(n)$  as given in the following equation:

$$f(n) = g(n) + h(n) \quad (1)$$

The total weight obtained at each node is the deciding factor for optimization. When the algorithm is implemented to compute the shortest path from source to destination, the nodes are divided into three groups: open (fringe), closed, and uninitialized (unevaluated). Table I shows the closed, open, and unevaluated list of nodes in the A\* illustration shown

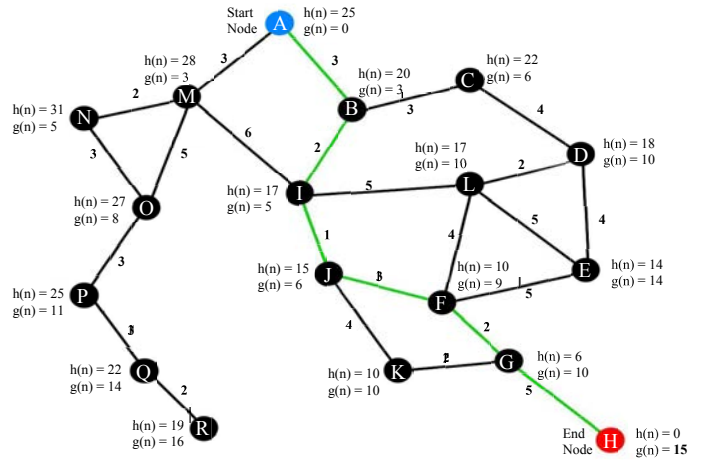


Fig. 3. Illustration of A\* Algorithm to Compute the Shortest Path between Start and End Node.

in figure 3. When the start node and destination node are determined as A and H, the shortest path between them is evaluated. This cheapest path offers the fastest travel time from the start node to the destination, assuming the data transfer speed is the same across all possible paths. From the patient's residence to the medical facility, the path proposed by the A\* algorithm will allow for the shortest time and least energy used, avoiding unnecessary nodes and data transport.

## VI. IMPLEMENTATION AND VALIDATION OF SMART RESPONSE PLAN


### A. Custom-Built Health Monitoring Unit

The Health Monitoring Unit and Node Clustering Unit was designed with the help of commercially off-the-shelf components. The health monitoring unit was designed using an MCP9808 temperature sensor, and MAX30102 Pulse Oximeter as a wearable. The Node Clustering Unit was implemented using a single-board computer, the Raspberry Pi 3+. The data





(fringe) node and the unevaluated nodes are tabulated to understand the algorithm. It can be seen that the shortest path from the start to destination node is determined with the minimal amount of nodes in between them.

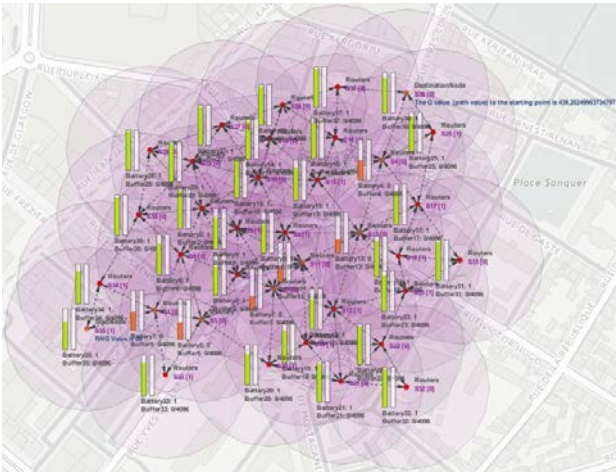

2) *Node Clustering Based on Parameters:* The management of a large number of health monitoring units in various residential environments can be overwhelming at times. Measuring patient temperature and heart rate data, and assigning the data to an individual node for countless patients can be better facilitated through basic node clustering. As an addition to optimized algorithmic pathfinding, clustering patient data in the form of nodes based on an arbitrary measurement taken over an interval of time was also designed using the CupCarbon software. This basic implementation provides a useful role in data management and organization, grouping all nodes into three categories: safe, warning, and critical. Using a random number generator between one to one hundred as the arbitrary deciding factor, each node's random value is changed and assessed every second. If the value is over the arbitrary value of 80, the node emits a red-colored LED with a printed "critical" statement. If the value is between 61 and 80, inclusive, the node emits a yellow-colored LED with a printed "warning" statement. Finally, if the value is equal to or less than 60 the node emits a green colored LED with a printed "safe" statement. As mentioned before, every node is reevaluated every second, and the loop repeats infinitely. Figure 7 shows the clustering of nodes into critical, warning, and safe.

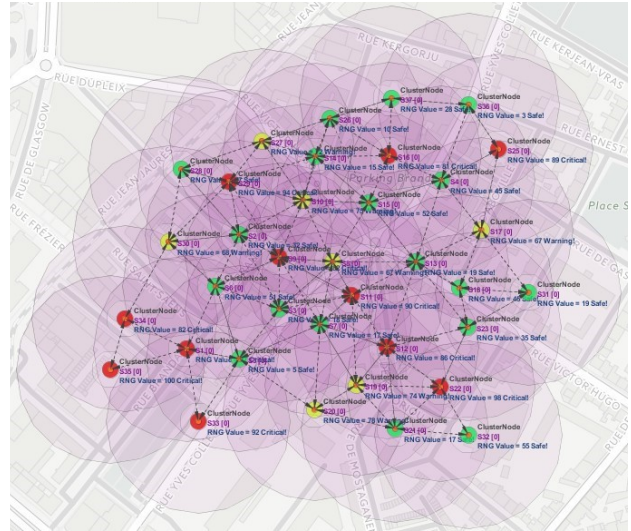


TABLE III  
SMART RESPONSE PLAN EVALUATION IN CUPCARBON.

## VII. CONCLUSIONS AND FUTURE RESEARCH

to implement, as it requires minimal resources. Community-Based remote assistance helps in improving the quality of life and reduces the amount of money spent on individual wearables. This framework helps in keeping every user aware of their health, as people grouped under warning and safe are also informed of their status. Future research involves implementing a similar framework with other monitor solutions such as respiratory monitoring, sleep monitoring, etc.

## VIII. ACKNOWLEDGMENT

This material is based upon work supported by the National Science Foundation under Grant Nos. OAC-1924112 and OAC-1924117. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the National Science Foundation.

## REFERENCES

- [1] S. P. Mohanty, U. Choppali, and E. Kougianos, "Everything You wanted to Know about Smart Cities," *IEEE Consumer Electronics Magazine*, vol. 5, no. 3, pp. 60–70, July 2016.
- [2] A. K. Tripathy, P. K. Tripathy, N. K. Ray, and S. P. Mohanty, "iTour: The Future of Smart Tourism: An IoT Framework for the Independent Mobility of Tourists in Smart Cities," *IEEE Consumer Electronics Magazine*, vol. 7, no. 3, pp. 32–37, May 2018.
- [3] M. L. Rajaram, E. Kougianos, S. P. Mohanty, and U. Choppali, "Wireless Sensor Network Simulation Frameworks: A Tutorial Review," *IEEE Consumer Electronics Magazine*, vol. 5, no. 2, pp. 63–69, April 2016.
- [4] E. Kougianos, S. P. Mohanty, G. Coelho, U. Albalawi, and P. Sundaravadivel, "Design of a high-performance system for secure image communication in the internet of things," *IEEE Access*, vol. 4, pp. 1222–1242, 2016.
- [5] P. Sundaravadivel, E. Kougianos, S. P. Mohanty, and M. K. Ganapathiraju, "Everything you wanted to know about smart health care: Evaluating the different technologies and components of the internet of things for better health," *IEEE Consumer Electronics Magazine*, vol. 7, no. 1, pp. 18–28, Jan. 2018.
- [6] M. L. Popovich, J. M. Henderson, and J. Stinn, "Information technology in the age of emergency public health response," *IEEE Engineering in Medicine and Biology Magazine*, no. 5, pp. 48–55, 2002.
- [7] A. Bounceur, "Cupcarbon: A new platform for designing and simulating smart-city and iot wireless sensor networks (sci-wsn)," in *Proceedings of the International Conference on Internet of Things and Cloud Computing*, ser. ICC '16, 2016, pp. 1:1–1:1.
- [8] K. Mehdi, M. Lounis, A. Bounceur, and T. Kechadi, "Cupcarbon: A multi-agent and discrete event wireless sensor network design and simulation tool," in *Proceedings of the 7th International ICST Conference on Simulation Tools and Techniques*, 2014.
- [9] H. Bala, V. Venkatesh, S. Venkatraman, and J. Bates, "If the worst happens: Five strategies for developing and leveraging information technology-enabled disaster response in healthcare," *IEEE Journal of Biomedical and Health Informatics*, vol. 20, no. 6, pp. 1545–1551, 2016.
- [10] Y. H. Lai, G. M. Tan, and Y. Ma, "Key points in enacting provincial soil erosion and water loss crisis emergency response plan," in *Proceedings of the International Conference on Business Management and Electronic Information*, May 2011, pp. 732–736.
- [11] J. Carrillo, H. Bogotá, D. Borda, and S. González, "Implementation of geographic knowledge in oil spill response plan for colombian offshore projects," in *Proc. IEEE International Geoscience and Remote Sensing Symposium (IGARSS)*, July 2015, pp. 4856–4859.
- [12] E. H. Kaplan, D. L. Craft, and L. M. Wein, "Emergency response to a smallpox attack: The case for mass vaccination," *Proceedings of the National Academy of Sciences*, vol. 99, no. 16, pp. 10935–10940, 2002.
- [13] H. Yu, G. Liu, and Y. Liu, "The emergency decision-making: How to trigger the level of emergency response plan with forecast updates," in *Proc. International Conference on Services Systems and Services Management*, July 2012.
- [14] S. Zhou, T. Zhang, and H. Qin, "The fire emergency response plan simulation based on particle system," in *Proceedings of the First International Conference on Intelligent Networks and Intelligent Systems*, 2008.
- [15] H. Fuyou, Z. Hailong, and D. Liyan, "Research on evaluation model of emergency response plans," in *Proc. International Conference on Mechatronics and Automation*, Aug 2009, pp. 5117–5122.
- [16] X. Liu and D. Gong, "A comparative study of a-star algorithms for search and rescue in perfect maze," in *Proceedings of the International Conference on Electric Information and Control Engineering*, 2011, pp. 24–27.
- [17] P. O. N. Saian, Suyoto, and Pranowo, "Optimized a-star algorithm in hexagon-based environment using parallel bidirectional search," in *Proc. 8th International Conference on Information Technology and Electrical Engineering (ICITEE)*, Oct 2016, pp. 1–5.
- [18] I. S. AlShawi, L. Yan, W. Pan, and B. Luo, "Lifetime enhancement in wireless sensor networks using fuzzy approach and a-star algorithm," *IEEE Sensors Journal*, vol. 12, no. 10, pp. 3010–3018, 2012.
- [19] T. H. S. Li, C. Y. Liu, P. H. Kuo, N. C. Fang, C. H. Li, C. W. Cheng, C. Y. Hsieh, L. F. Wu, J. J. Liang, and C. Y. Chen, "A three-dimensional adaptive pso-based packing algorithm for an iot-based automated e-fulfillment packaging system," *IEEE Access*, no. 99, pp. 1–1, 2017.
- [20] P. Lopez-Meyer, S. Tiffany, Y. Patil, and E. Sazonov, "Monitoring of cigarette smoking using wearable sensors and support vector machines," *IEEE Transactions on Biomedical Engineering*, vol. 60, no. 7, pp. 1867–1872, July 2013.
- [21] R. I. Ramos-Garcia, S. Tiffany, and E. Sazonov, "Using respiratory signals for the recognition of human activities," in *Proc. 38th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*, 2016.
- [22] P. Sundaravadivel, S. P. Mohanty, E. Kougianos, and U. Albalawi, "An energy efficient sensor for thyroid monitoring through the iot," in *2016 17th International Conference on Thermal, Mechanical and Multi-Physics Simulation and Experiments in Microelectronics and Microsystems (EuroSimE)*, 2016.
- [23] P. E. Hart, N. J. Nilsson, and B. Raphael, "A formal basis for the heuristic determination of minimum cost paths," *IEEE Transactions on Systems Science and Cybernetics*, vol. 4, no. 2, July 1968.
- [24] E. Ueland, "A\* (astar/ a star) search algorithm. easy to use," Mathworks.com, May 2016, <https://www.mathworks.com/matlabcentral/fileexchange/56877-a—astar—a-star-search-algorithm-easy-to-use>.